
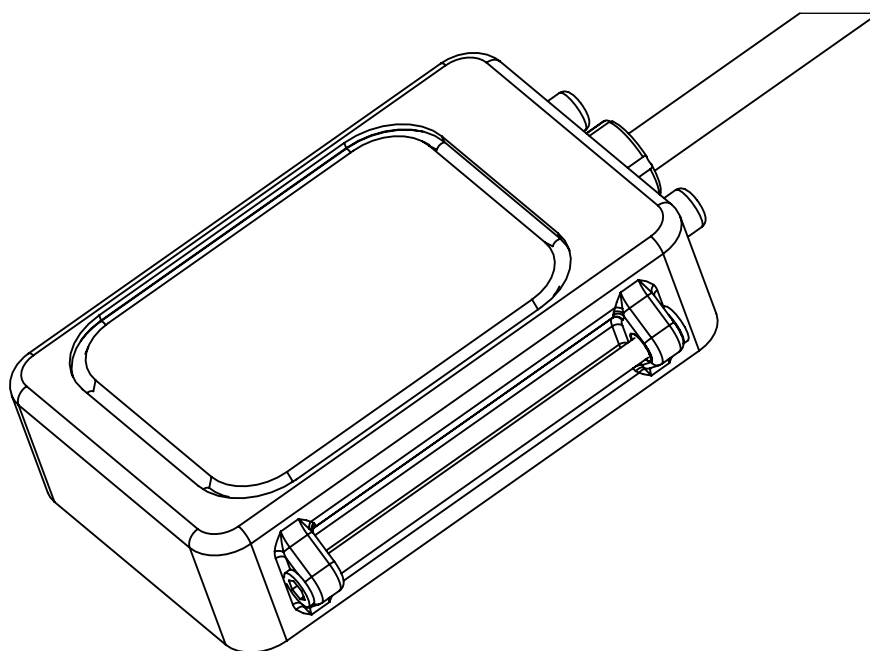


Instruction manual

Freedom computer and Liberty Handset Button replacement guide

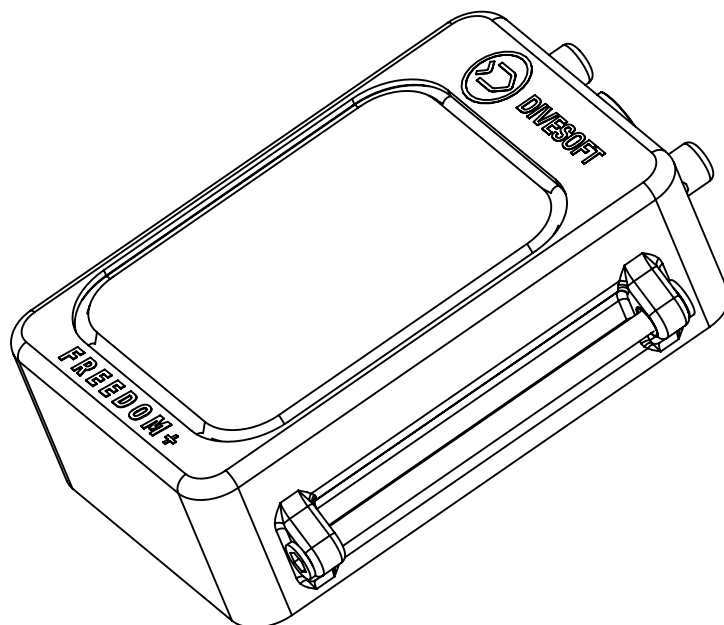


rev.1 _ 29.3.2023

Required tools




Hammer




Flat Head screwdriver



Diagonal Pliers



1969 Freedom button tool step 1



1938 Freedom button tool step 2




Piece of cloth or Cotton Swabs for cleaning.



eye protection

Required spares



7128 Button + 1 mm




1150 Button spring



1148 Button retaining ring


button spares can be orderd in set of 10pcs under 8318

For demonstration of the procedure we are going to use Freedom + as an example.
Do not manipulate with Liberty Handset Cable Clamping Nut while replacing handset buttons!

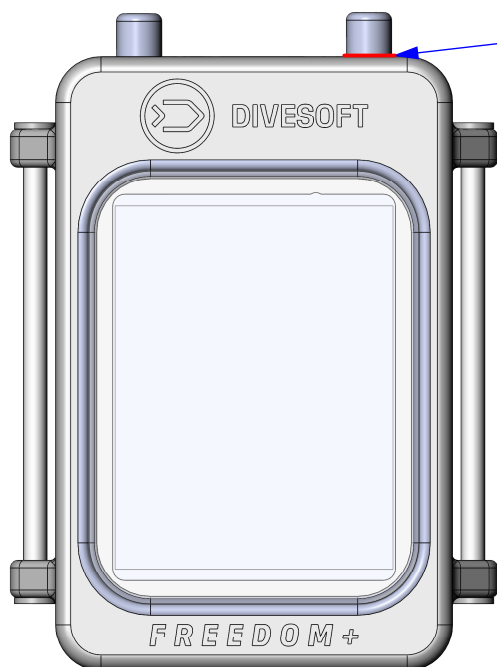

Remove the connector cap.

Using face/eye protection cut off the button's top as close to the body as possible using the Diagonal Pliers.
Be carefull to avoid scratching the body of the device.

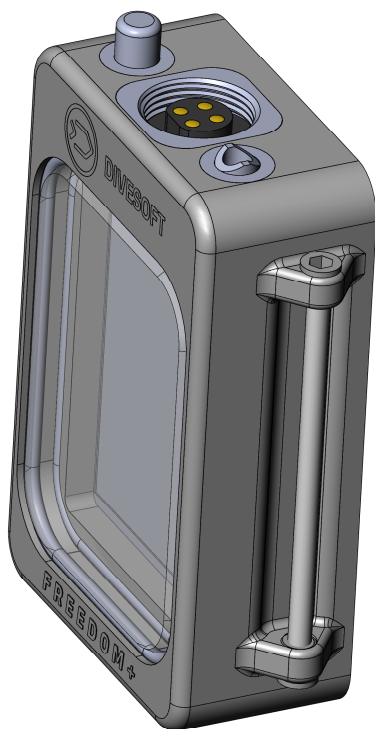


After cutting the button should look simmilar to the picture.



Push the remains of the button in using Flat Head Screwdriver and pry the Button Retaining Ring out.


Pay extra attention to the distance of the screwdriver tip. You may scratch the inside of the cavity by going too far.

Caution, parts may scatter due to the tension of the spring after removing the ring.

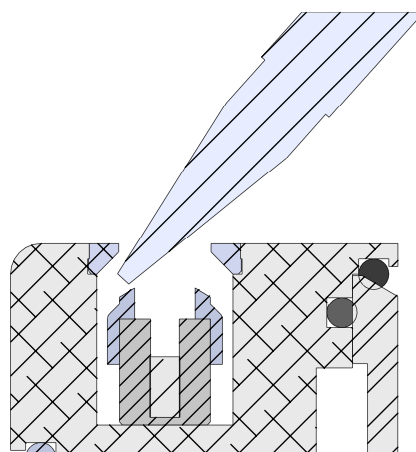



Remove the old parts



Clean the inside of the cavity using cloth or Cotton Swabs.


DO NOT USE caustic detergents!



Install new parts in order of spring, button and then retention ring.



Use the Button Tool number 1 to secure the ring

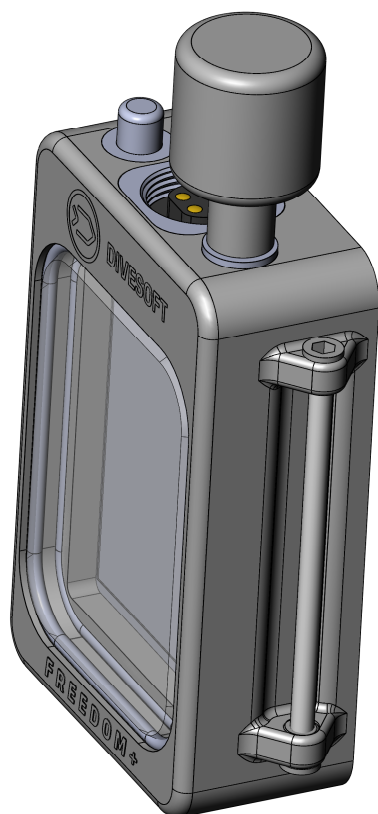

Use the Button Tool number 2 and the Hammer to press the ring all the way in.

As a last step
Power on the device and test the function of new button.